DBCLOUD
EXAMS

QUESTIONS & ANSWERS

verified



Technology Provider: The Linux Foundation


Exam: Certified Kubernetes Application Developer (CKAD)

Number of questions in the database: 34

Exam Version: NOV.2026

Question #1

Refer to Exhibit.

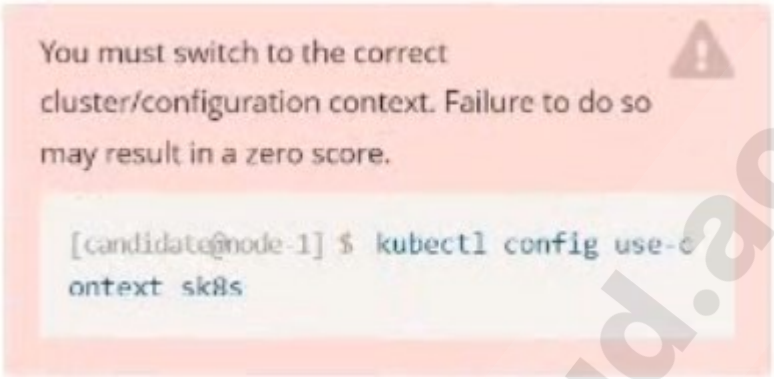

Task:

A pod within the Deployment named buffale-deployment and in namespace gorilla is logging errors.

1) Look at the logs identify errors messages.

Find errors, including User ''system:serviceaccount:gorilla:default'' cannot list resource ''deployment'' [...] in the namespace ''gorilla''


2) Update the Deployment buffalo-deployment to resolve the errors in the logs of the Pod.


The buffalo-deployment 'S manifest can be found at -/prompt/escargot/buffalo-deployment.yaml

Explanation:


Solution:

https://dbcloud.academy/

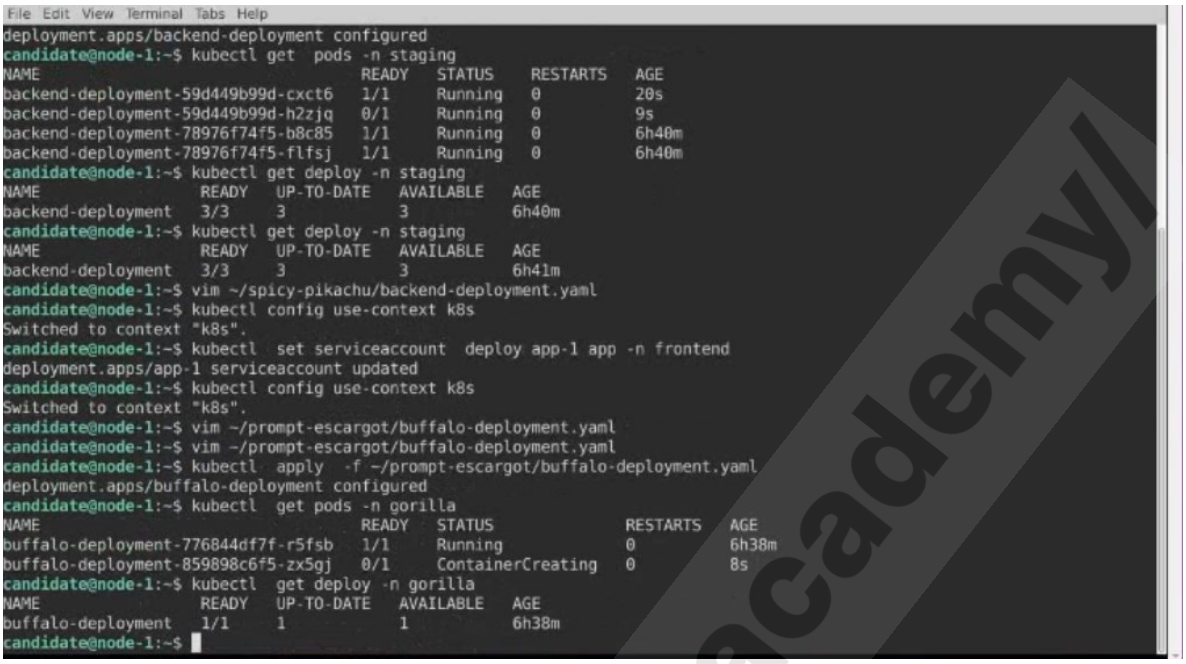


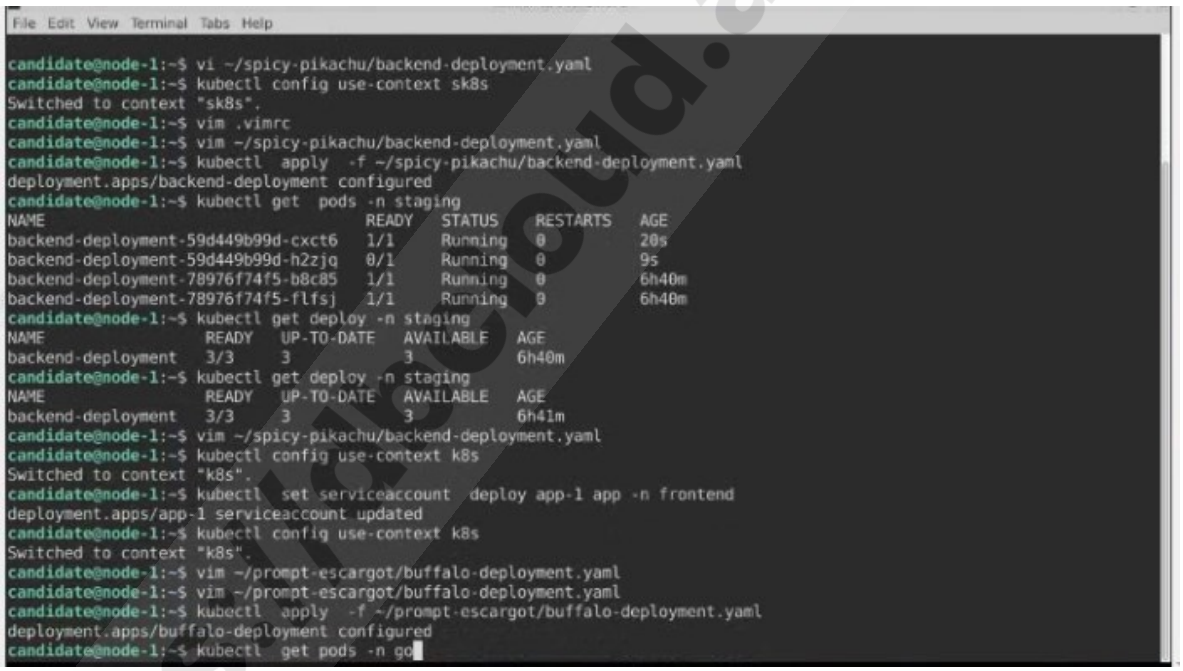

https://dbcloud.academy/

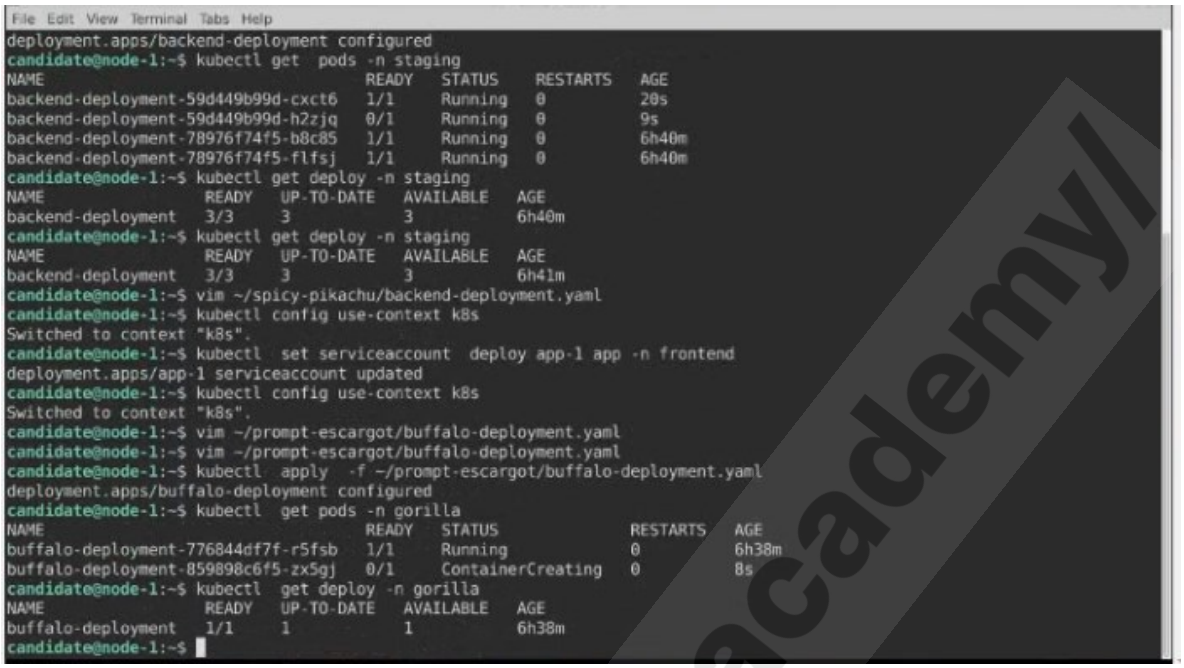



```
File  Edit  View  Terminal  Tabs  Help
deployment.apps/backend-deployment configured
candidate@node-1:~$ kubectl get  pods -n staging
NAME                                  READY   STATUS    RESTARTS   AGE
backend-deployment-59d449b99d-cxct6   1/1     Running   0          20s
backend-deployment-59d449b99d-h2zjq   0/1     Running   0          9s
backend-deployment-78976f74f5-b8c85   1/1     Running   0          6h40m
backend-deployment-78976f74f5-flfsj   1/1     Running   0          6h40m
candidate@node-1:~$ kubectl get deploy -n staging
NAME                 READY   UP-TO-DATE   AVAILABLE   AGE
backend-deployment   3/3     3            3           6h40m
candidate@node-1:~$ kubectl get deploy -n staging
NAME                 READY   UP-TO-DATE   AVAILABLE   AGE
backend-deployment   3/3     3            3           6h41m
candidate@node-1:~$ vim ~/spicy-pikachu/backend-deployment.yaml
candidate@node-1:~$ kubectl config use-context k8s
Switched to context "k8s".
candidate@node-1:~$ kubectl  set serviceaccount  deploy app-1 app -n frontend
deployment.apps/app-1 serviceaccount updated
candidate@node-1:~$ kubectl config use-context k8s
Switched to context "k8s".
candidate@node-1:~$ vim ~/prompt-escargot/buffalo-deployment.yaml
candidate@node-1:~$ vim ~/prompt-escargot/buffalo-deployment.yaml
candidate@node-1:~$ kubectl  apply  -f ~/prompt-escargot/buffalo-deployment.yaml
deployment.apps/buffalo-deployment configured
candidate@node-1:~$ kubectl  get pods -n gorilla
NAME                                  READY   STATUS              RESTARTS   AGE
buffalo-deployment-776844df7f-r5fsb   1/1     Running             0          6h38m
buffalo-deployment-859898c6f5-zx5gj   0/1     ContainerCreating   0          8s
candidate@node-1:~$ kubectl  get deploy -n gorilla
NAME                READY   UP-TO-DATE   AVAILABLE   AGE
buffalo-deployment   1/1     1            1           6h38m
candidate@node-1:~$
```

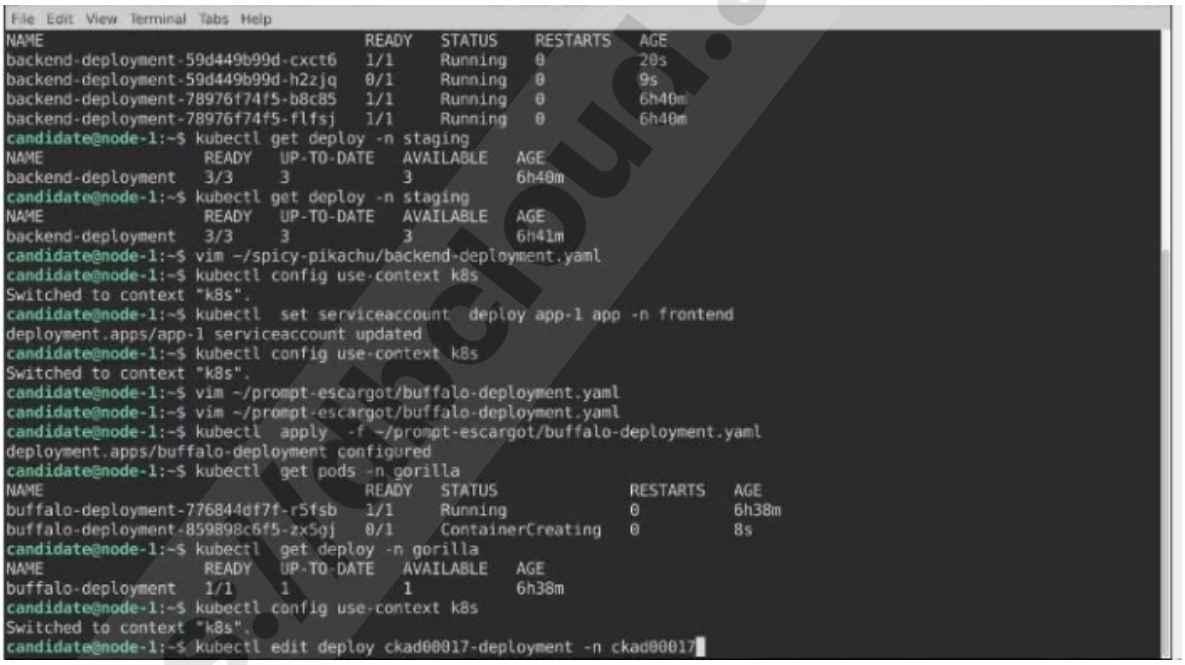


```
File  Edit  View  Terminal  Tabs  Help
NAME                                  READY   STATUS    RESTARTS   AGE
backend-deployment-59d449b99d-cxct6   1/1     Running   0          20s
backend-deployment-59d449b99d-h2zjq   0/1     Running   0          9s
backend-deployment-78976f74f5-b8c85   1/1     Running   0          6h40m
backend-deployment-78976f74f5-flfsj   1/1     Running   0          6h40m
candidate@node-1:~$ kubectl get deploy -n staging
NAME                 READY   UP-TO-DATE   AVAILABLE   AGE
backend-deployment   3/3     3            3           6h40m
candidate@node-1:~$ kubectl get deploy -n staging
NAME                 READY   UP-TO-DATE   AVAILABLE   AGE
backend-deployment   3/3     3            3           6h41m
candidate@node-1:~$ vim ~/spicy-pikachu/backend-deployment.yaml
candidate@node-1:~$ kubectl config use-context k8s
Switched to context "k8s".
candidate@node-1:~$ kubectl  set serviceaccount  deploy app-1 app -n frontend
deployment.apps/app-1 serviceaccount updated
candidate@node-1:~$ kubectl config use-context k8s
Switched to context "k8s".
candidate@node-1:~$ vim ~/prompt-escargot/buffalo-deployment.yaml
candidate@node-1:~$ vim ~/prompt-escargot/buffalo-deployment.yaml
candidate@node-1:~$ kubectl  apply  -f ~/prompt-escargot/buffalo-deployment.yaml
deployment.apps/buffalo-deployment configured
candidate@node-1:~$ kubectl  get pods -n gorilla
NAME                                  READY   STATUS              RESTARTS   AGE
buffalo-deployment-776844df7f-r5fsb   1/1     Running             0          6h38m
buffalo-deployment-859898c6f5-zx5gj   0/1     ContainerCreating   0          8s
candidate@node-1:~$ kubectl  get deploy -n gorilla
NAME                READY   UP-TO-DATE   AVAILABLE   AGE
buffalo-deployment   1/1     1            1           6h38m
candidate@node-1:~$ kubectl config use-context k8s
Switched to context "k8s".
candidate@node-1:~$ kubectl edit deploy ckad00017-deployment -n ckad00017
```


https://dbcloud.academy/

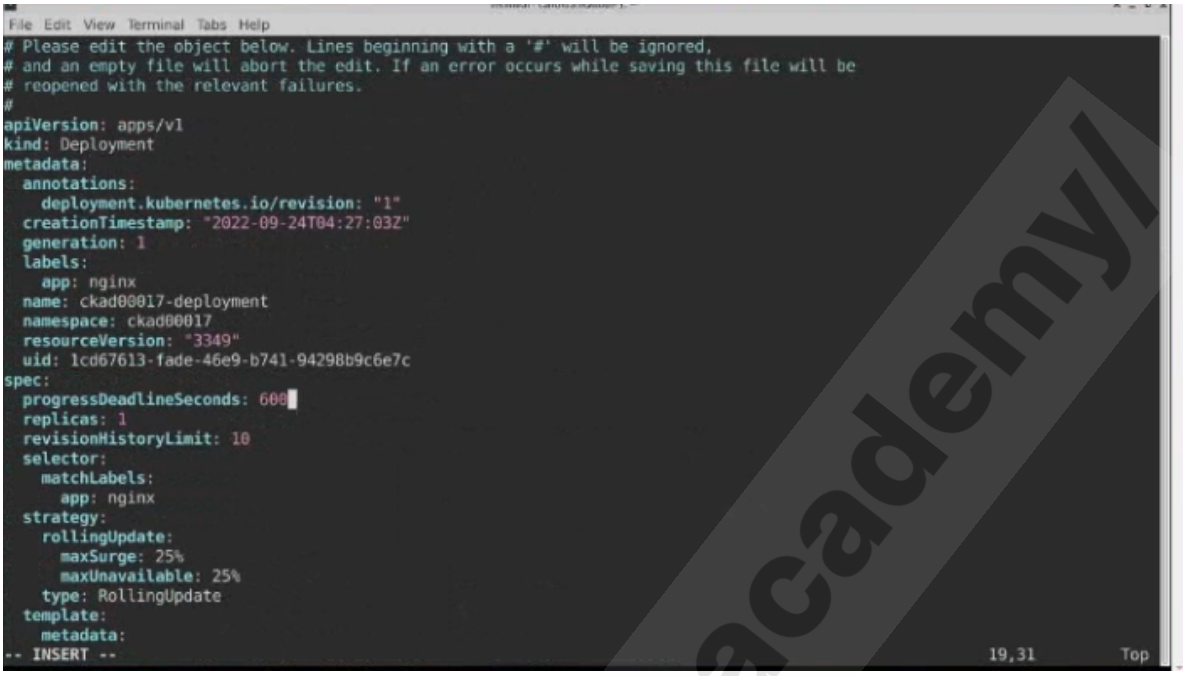

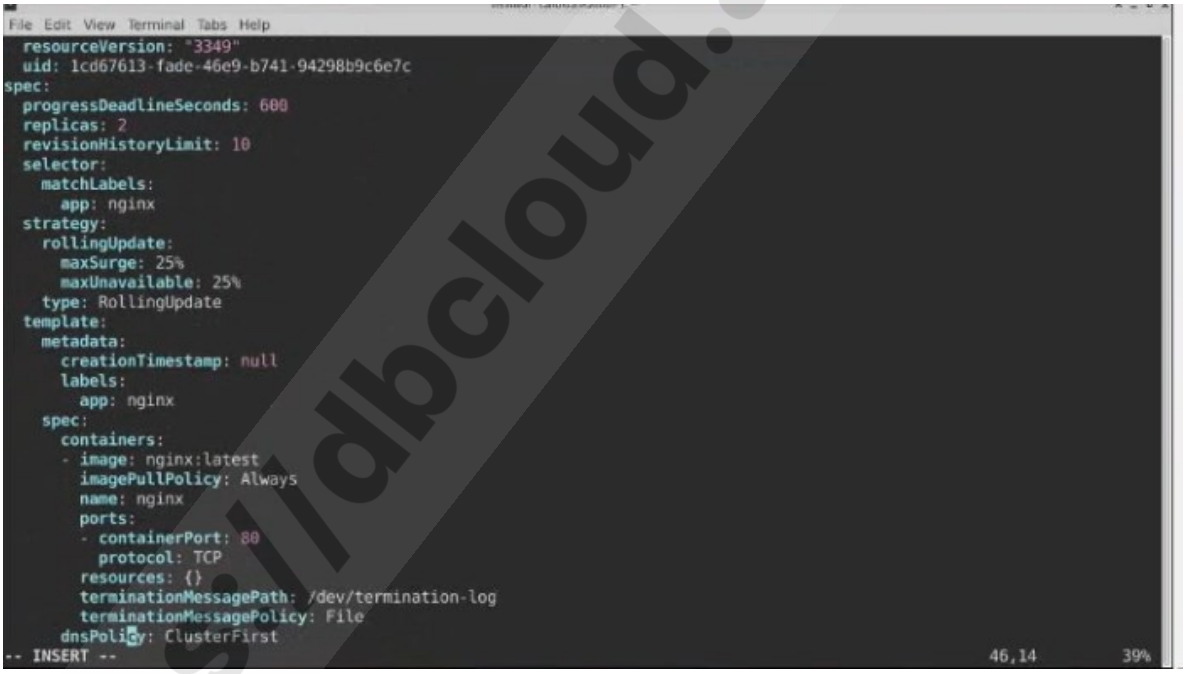

https://dbcloud.academy/

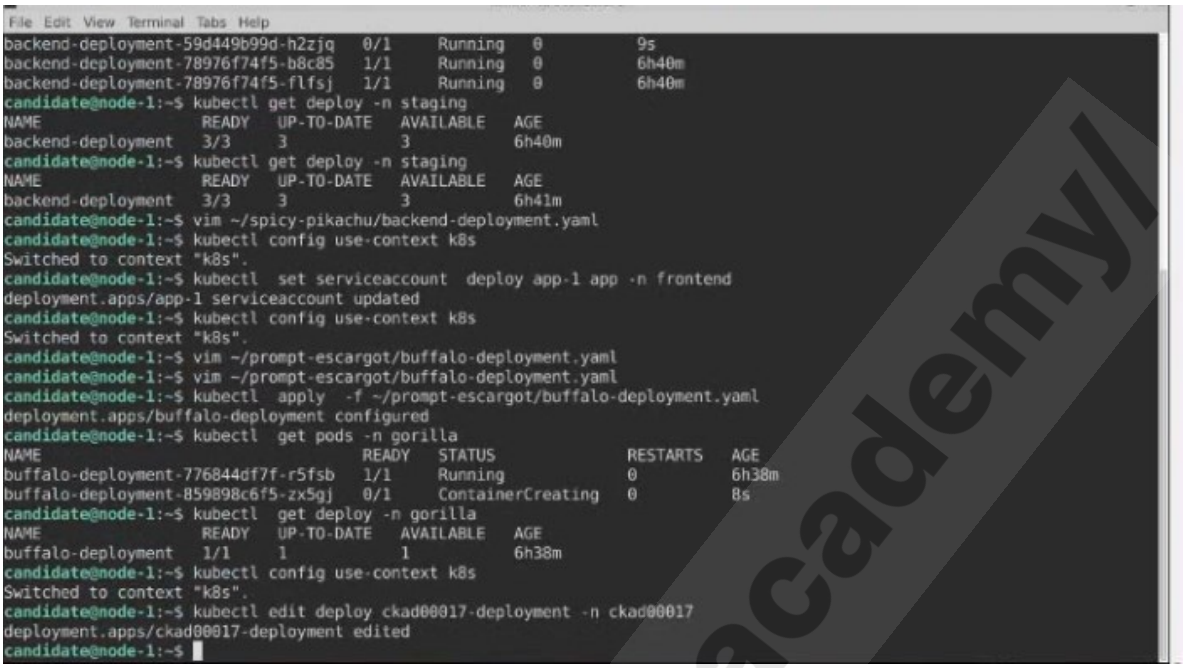

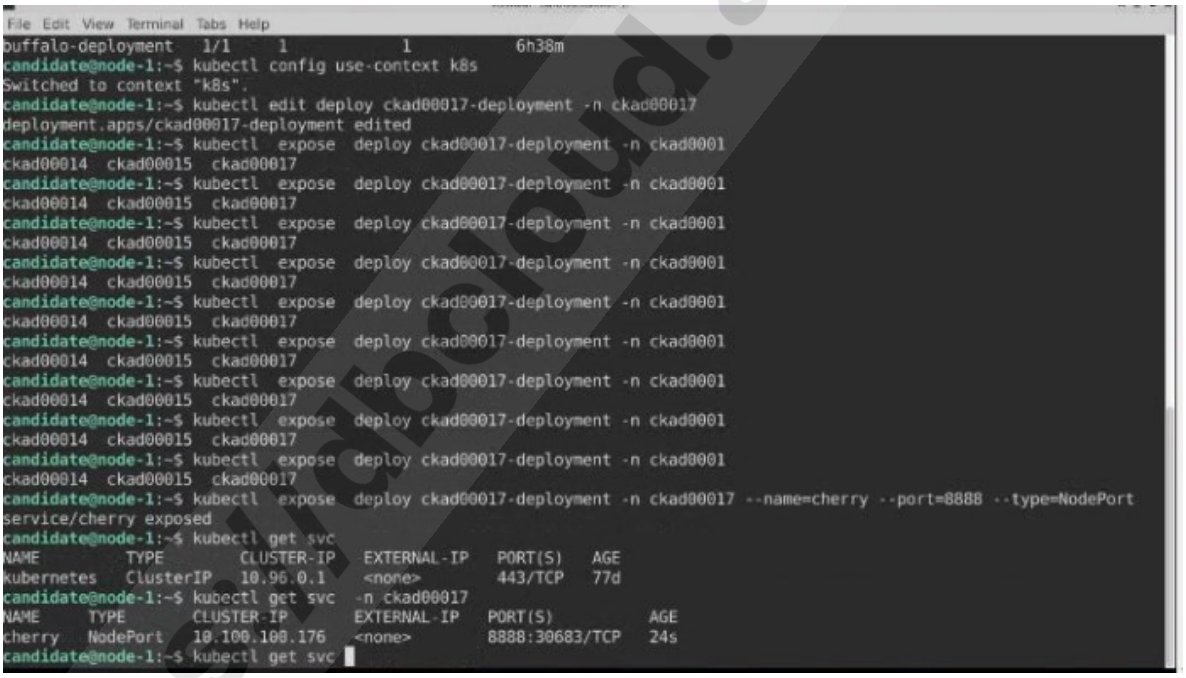

https://dbcloud.academy/

```
File  Edit  View  Terminal  Tabs  Help
candidate@node-1:~$ kubectl  expose  service   deploy ckad00017-deployment -n ckad00017 --name=cherry --port=8888 --type=N
odePort
Error from server (NotFound): services "deploy" not found
Error from server (NotFound): services "ckad00017-deployment" not found
candidate@node-1:~$ kubectl get svc  -n ckad00017
NAME     TYPE       CLUSTER-IP       EXTERNAL-IP   PORT(S)          AGE
cherry   NodePort   10.100.100.176   <none>        8888:30683/TCP   46s
candidate@node-1:~$ history
    1  vi ~/spicy-pikachu/backend-deployment.yaml
    2  kubectl config use-context sk8s
    3  vim .vimrc
    4  vim ~/spicy-pikachu/backend-deployment.yaml
    5  kubectl  apply  -f ~/spicy-pikachu/backend-deployment.yaml
    6  kubectl get  pods -n staging
    7  kubectl get deploy -n staging
    8  vim ~/spicy-pikachu/backend-deployment.yaml
    9  kubectl config use-context k8s
   10  kubectl  set serviceaccount  deploy app-1 app -n frontend
   11  kubectl config use-context k8s
   12  vim ~/prompt-escargot/buffalo-deployment.yaml
   13  kubectl  apply  -f ~/prompt-escargot/buffalo-deployment.yaml
   14  kubectl  get pods -n gorilla
   15  kubectl  get deploy -n gorilla
   16  kubectl config use-context k8s
   17  kubectl edit deploy ckad00017-deployment -n ckad00017
   18  kubectl  expose  deploy ckad00017-deployment -n ckad00017 --name=cherry --port=8888 --type=NodePort
   19  kubectl get svc
   20  kubectl get svc  -n ckad00017
   21  kubectl  expose  service   deploy ckad00017-deployment -n ckad00017 --name=cherry --port=8888 --type=NodePort
   22  kubectl get svc  -n ckad00017
   23  history
candidate@node-1:~$
```

Question #2

Refer to Exhibit.



Context


Your application's namespace requires a specific service account to be used.

Task

Update the app-a deployment in the production namespace to run as the restrictedservice service account. The service account has already been created.


Explanation:
Solution:

https://dbcloud.academy/

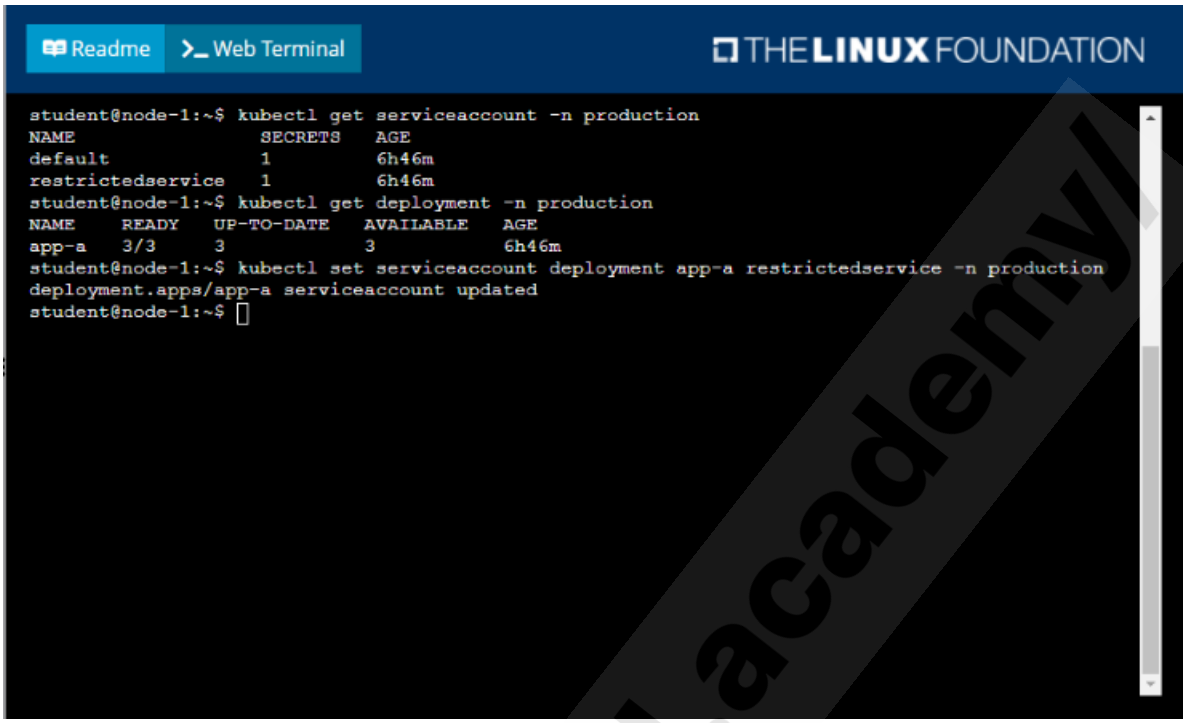

Question #3

Refer to Exhibit.

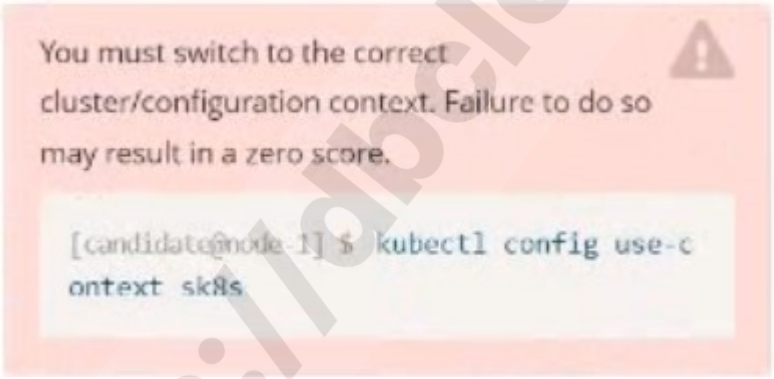


Context

You are asked to prepare a Canary deployment for testing a new application release.

Task:

A Service named krill-Service in the goshark namespace points to 5 pod created by the Deployment named current-krill-deployment

https://dbcloud.academy/

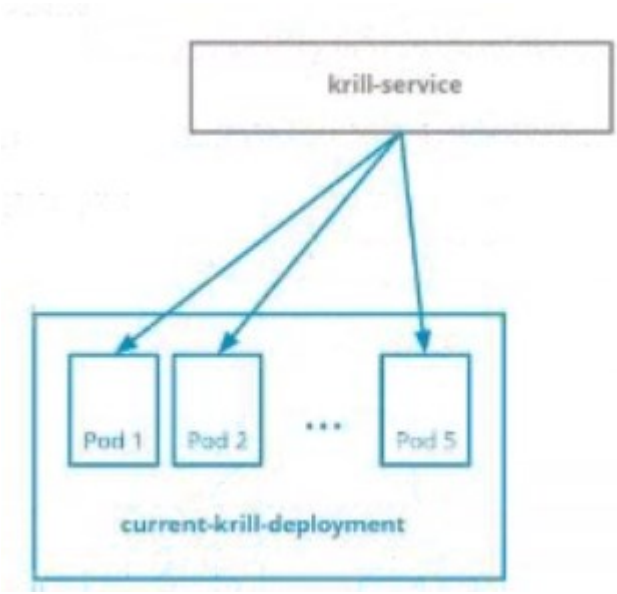


1) Create an identical Deployment named canary-kill-deployment, in the same namespace.

2) Modify the Deployment so that:

-A maximum number of 10 pods run in the goshawk namespace.

-40% of the krill-service 's traffic goes to the canary-krill-deployment pod(s)

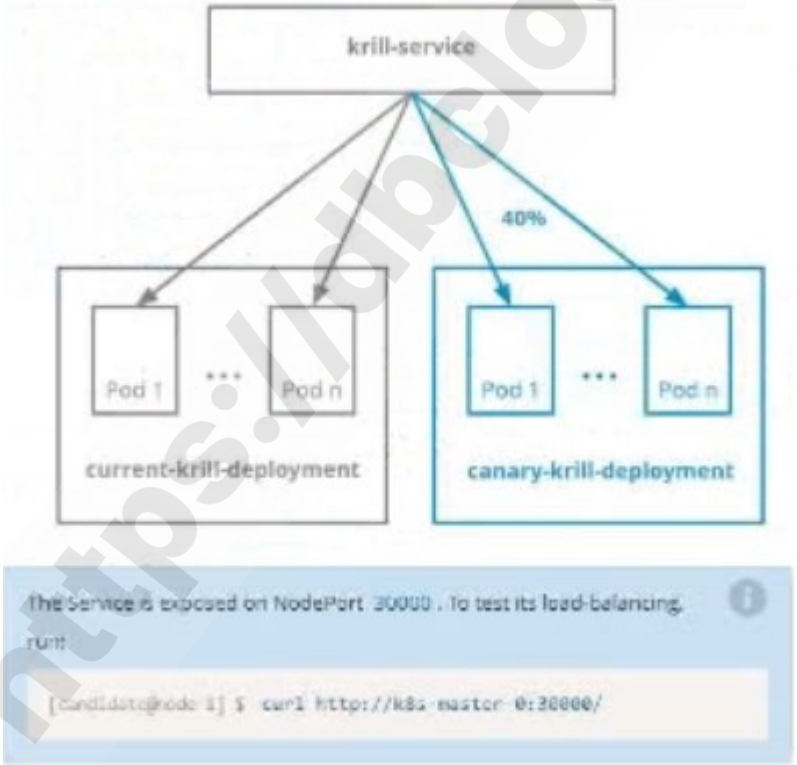

https://dbcloud.academy/

Explanation:
Solution:

```
candidate@node-1:~/humane-stork$ kubectl  scale  deploy canary-krill-deployment --replicas 4 -n goshawk
deployment.apps/canary-krill-deployment scaled
candidate@node-1:~/humane-stork$ kubectl get deploy -n goshawk
NAME                       READY   UP-TO-DATE   AVAILABLE   AGE
canary-krill-deployment    4/4     4            4           46s
current-krill-deployment   5/5     5            5           7h22m
candidate@node-1:~/humane-stork$ wget https://k8s.io/examples/
```

```
File  Edit  View  Terminal  Tabs  Help
candidate@node-1:~/humane-stork$ wget https://k8s.io/examples/admin/resource/quota-pod.yaml
--2022-09-24 11:43:51--  https://k8s.io/examples/admin/resource/quota-pod.yaml
Resolving k8s.io (k8s.io)... 34.107.204.206, 2600:1901:0:26f3::
Connecting to k8s.io (k8s.io)|34.107.204.206|:443... connected.
HTTP request sent, awaiting response... 301 Moved Permanently
Location: https://kubernetes.io/examples/admin/resource/quota-pod.yaml [following]
--2022-09-24 11:43:52--  https://kubernetes.io/examples/admin/resource/quota-pod.yaml
Resolving kubernetes.io (kubernetes.io)... 147.75.40.148
Connecting to kubernetes.io (kubernetes.io)|147.75.40.148|:443... connected.
HTTP request sent, awaiting response... 200 OK
Length: 90 [application/x-yaml]
Saving to: 'quota-pod.yaml'

quota-pod.yaml                100%[=============================================>]      90  --.-KB/s    in 0s

2022-09-24 11:43:52 (15.0 MB/s) - 'quota-pod.yaml' saved [90/90]

candidate@node-1:~/humane-stork$ vim quota-pod.yaml
```

```
File  Edit  View  Terminal  Tabs  Help

2022-09-24 11:43:52 (15.0 MB/s) - 'quota-pod.yaml' saved [90/90]

candidate@node-1:~/humane-stork$ vim quota-pod.yaml
candidate@node-1:~/humane-stork$ kubectl  create  -f quota-pod.yaml
resourcequota/pod-demo created
candidate@node-1:~/humane-stork$ kubectl get quota -n go
No resources found in go namespace.
candidate@node-1:~/humane-stork$ kubectl get quota -n goshawk
NAME       AGE   REQUEST      LIMIT
pod-demo   19s   pods: 9/10
candidate@node-1:~/humane-stork$ curl http://k8s-master-0:30000/
current-krill-deployment-fb7c7995c-kvtjr
app.kubernetes.io/name="current"
app.kubernetes.io/part-of="krill"
pod-template-hash="fb7c7995c"candidate@node-1:~/humane-stork$ curl http://k8s-master-0:30000/
current-krill-deployment-fb7c7995c-4whfm
app.kubernetes.io/name="current"
app.kubernetes.io/part-of="krill"
pod-template-hash="fb7c7995c"candidate@node-1:~/humane-stork$ curl http://k8s-master-0:30000/
canary-krill-deployment-5f78fd4786-dfk7l
app.kubernetes.io/name="canary"
app.kubernetes.io/part-of="krill"
pod-template-hash="5f78fd4786"candidate@node-1:~/humane-stork$ curl http://k8s-master-0:30000/
canary-krill-deployment-5f78fd4786-z5zrt
app.kubernetes.io/name="canary"
app.kubernetes.io/part-of="krill"
pod-template-hash="5f78fd4786"candidate@node-1:~/humane-stork$ curl http://k8s-master-0:30000/
canary-krill-deployment-5f78fd4786-2774b
app.kubernetes.io/name="canary"
app.kubernetes.io/part-of="krill"
pod-template-hash="5f78fd4786"candidate@node-1:~/humane-stork$
```

Question #4

Refer to Exhibit.

https://dbcloud.academy/